


The NATIONAL TIME Addressable Monitor and Priority Monitor modules provide a style B/D initiating input to monitor dry contact initiating devices. The powerful *DigiComm*™ communication protocol enables reliable and accurate information to be exchanged between the monitor modules and the Fire Alarm Control Panel. The monitor modules feature programmable status LED indicators. The Priority Monitor Module utilizes the *DigiComm*™ communication interrupt protocol to provide faster response for selected high priority devices. The monitor modules mount to a dedicated 4" square or 2 gang electrical box.



Features:

- Dry Contact Alarm and/or Monitoring Applications
- Addressable 2 Wire Initiating Circuit
- Supervised Style B/D Input
- Style 4, 6 or 7 Communication Wiring
- Priority Interrupt for Faster Response Time (D900-MONITOR-P)
- Superior DigiComm™ Digital Communication Protocol
- LED Indicator
- U.L. Listed

Wiring Diagrams

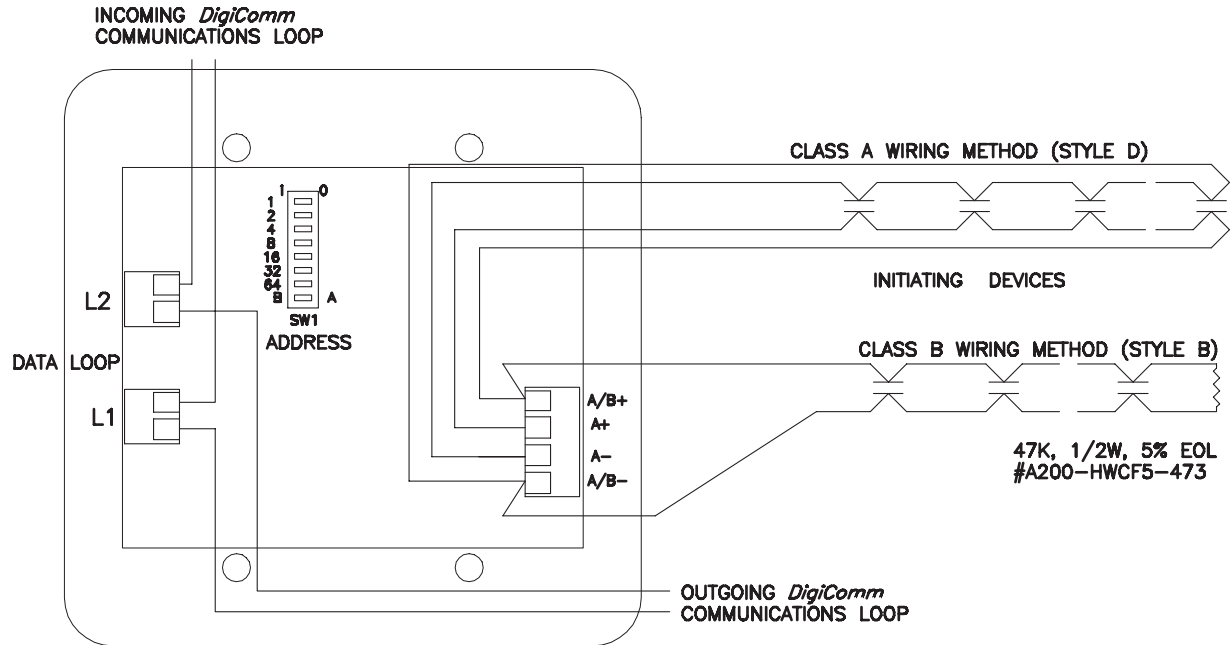

Specifications

INPUT: Style B/D

Dry Contact Initiating Devices
Max Loop resistance 50 ohms

DIGICOMM™ LOOP POWER: Alarm and Supervisory Currents 600uA (LED Active 5mA)

COMMUNICATION: Style 4, 6, or 7 (via *DigiComm*™ Communication Loop)

FINISH: White Polycarbonate

DIMENSIONS: 4.5" x 4.5" x .9"

NET WT.: 2.5 oz.

MOUNTING: 4" sq. or 2 Gang Electrical Box (minimum depth of 2-1/8")

Ordering Information

| Part No. | Description |
|----------------|---|
| D900-MONITOR-P | <i>DigiComm</i> ™ Priority Monitor Module |
| D900-MONITOR | <i>DigiComm</i> ™ Monitor Module |