






The NATIONAL TIME *DigiComm*™ Detector bases provide the flexibility to meet any installation requirements. The D900-IDENT Address card resides in the detector base permitting easy, cost effective detector replacement without re-programming or addressing. The bases are mechanically fitted to accept only the proper detector or isolator. The detector bases come in ceiling mounted 4" and 6" sizes, a 6" base with sounder and a 6" base with relay. The sounder is available in standard high frequency or 520 Hz low frequency. The 6" sounder and relay bases require 24VDC power.

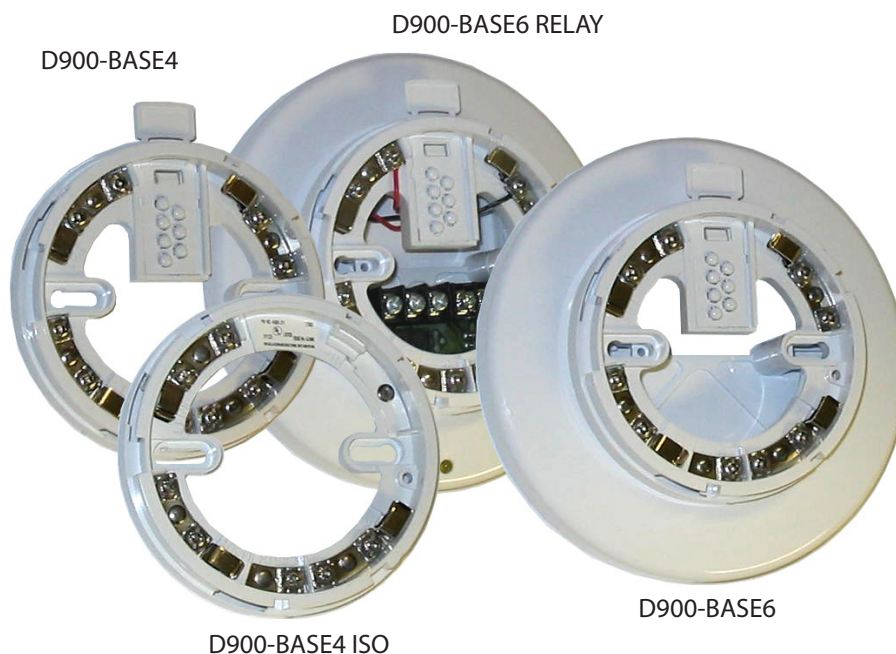


## Features:

- Style 4, 6, or 7 Communication Wiring
- Attractive Packaging
- Remote Auxiliary Relay
- Remote Sounder
- Error Free Installation
- U.L. Listed

## Wiring Diagrams

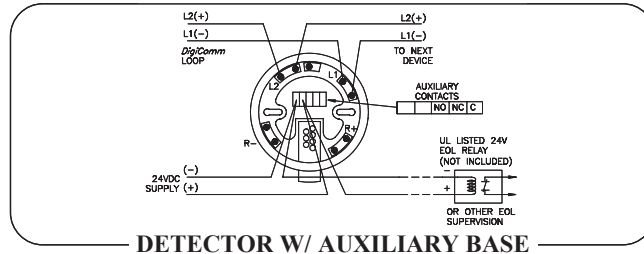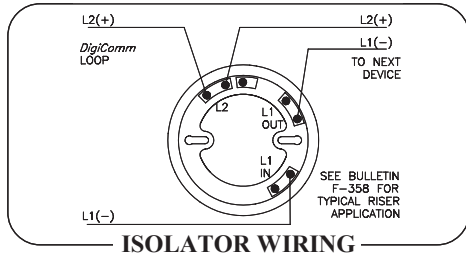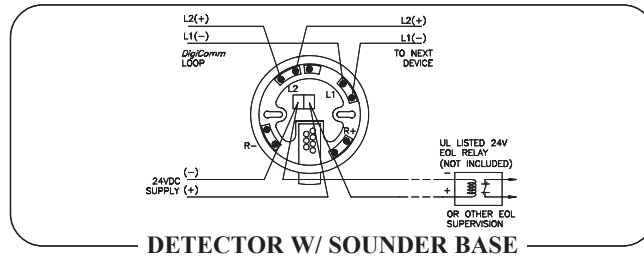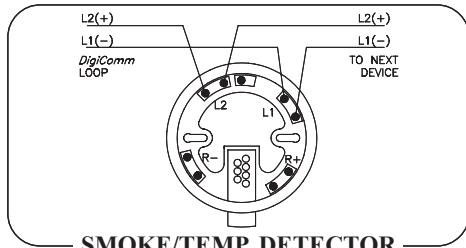


## Mounting

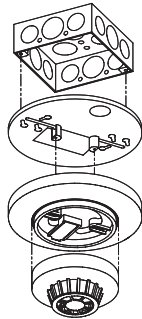

6" Bases mount to 4" square/octagon, 2 gang, single gang or plaster rings (not supplied)

Detector Head

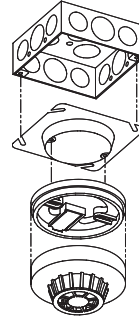

4" Bases mount to 4" square/octagon with round plaster ring (not supplied)

Detector or Isolator Head

## Specifications

**BASE POWER (EXTERNAL SUPPLY):** D900-BASE6 SOUND: Alarm 30mA  
 D900-BASE6 AUX: Alarm 36mA  
 D900-BASE6 SOUND-520Hz: Alarm 0.070A low (75dB@10'); 0.130A High (85dB@10')

**OPERATING RANGE:** D900-BASE6 SOUND, D900-BASE6 SOUND-520 & D900-BASE6 AUX: 17-30VDC

**FINISH:** White Polycarbonate

**DIMENSIONS:** D900-BASE4 & D900-BASE4 ISO: 4" dia. x .62"  
 D900-BASE6: 6" dia. x 1.1"

Isolator Base does not require D900-IDENT Address Card.

## Ordering Information

Part No.	Description
D900-BASE4	4" Digicomm™ Detector Base
D900-BASE6	6" Digicomm™ Detector Base
D900-BASE4 ISO	4" Digicomm™ Isolator Base
D900-BASE6 SOUND	6" Digicomm™ Detector Base with Sounder
D900-BASE6 SOUND-520	6" Digicomm™ Detector Base with 520 Hz Sounder
D900-BASE6 AUX	6" Digicomm™ Detector Base with Auxiliary SPDT Relay
D900-IDENT	Digicomm™ Detector Identification Card